



# JOHNSTONE SUPPLY

Your HVACR Source



## Stock Up On Essential HVACR Products!

### Emerson Rescue™ Motor

- 48 frame, reversible, all-angle mount, 36" leads all terminated
- Replaces 28 different ratings, with a multitude of mounting options
- Diam.: 5-5/8"
- HP: 1/2-1/6
- Volts: 208-230
- Mfg. #5465



**98<sup>99</sup>**  
S89-409

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### 70 Series™ Electronic Non-Programmable Thermostat

- Single-stage
- Battery powered with lighted display
- Millivolt compatible
- Mfg. #1F78-144



**23<sup>99</sup>**  
L39-007



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Bullet 3-In-1 Line Tap Valve

- For charging and evacuating refrigeration systems
- For 1/4", 5/16", and 3/8" round or uneven tubing 2" clearance
- Smallest complete piercing valve with its own key
- Mfg. #BPV31



**2<sup>99</sup>**  
B11-039

### Universal Electronic Fan Timer

- Integrates control of combustion blower and circulating fan operations for a gas warm air appliance
- Temperature range: -40° F to +175° F
- Replaces: all ST9101's, ST9120's, ST9141's and ST9160's
- Mfg. #ST9120U1011



**82<sup>99</sup>**  
L44-673

### 23-Pocket Tool Carrier

- 8" L x 8" W x 17" H
- Tools pictured not included
- Mfg. #1526



**21<sup>99</sup>**  
H85-563

### New LightStar300 LED Flashlight

- Dual mode (300 or 100 lumens)
- Attached clip, wrist strap and batteries included
- Mfg. #TLF-3002AA-BK

**29<sup>99</sup>**  
G35-865



Prices Valid June 1-30, 2011



## VisionPro® 8000 Electronic Programmable Thermostats

Honeywell

- 7 day programming
- Large backlit touch screen
- Auto or manual changeover
- Multiple hold options for program override
- Service reminders can be programmed for air filter, humidifier pad or ultraviolet lamp replacement
- Adaptive Intelligent Recovery™



**119<sup>99</sup>**

L40-434

Order #	Mfg. #	System Application	Stages Heat/Cool	Power Method	Price
L40-434	TH8110U1003	Heat/Cool/Heat Pump	1/1	Hardwired or Battery	119.99
L40-435	TH8320U1008	Heat/Cool/Heat Pump	3/2	Hardwired or Battery	129.99

## FocusPRO® 6000 Electronic Programmable Thermostats

Honeywell

- Selectable 5+1+1 or 5+2 day programming
- Large display on L40-703; standard display on L40-702
- Auto or manual changeover
- Easy side door battery access



L40-702



L40-703

**64<sup>99</sup>**

L40-702

Order #	Mfg. #	System Application	Stages Heat/Cool	Power Method	Price
L40-702	TH6220D1002	Heat/Cool/Heat Pump	2/2	Hardwired or Battery	64.99
L40-703	TH6220D1028	Heat/Cool/Heat Pump	2/2	Hardwired or Battery	66.99



## FocusPRO® 5000 Electronic Non-Programmable Thermostats

Honeywell

- Precise comfort control
- Display size: L40-704 - 3.75 sq.in.; L40-705 - 5.09 sq.in.; L40-438 - 2.98 sq.in.
- Auto or manual changeover
- Easy access battery replacement



L40-438



L40-704

**41<sup>99</sup>**

L40-438

Order #	Mfg. #	System Application	Stages Heat/Cool	Power Method	Price
L40-438	TH5110D1022	Heat/Cool/Heat Pump	1/1	Hardwired or Battery	41.99
L40-704	TH5220D1003	Heat/Cool/Heat Pump	2/2	Hardwired or Battery	46.99
L40-705	TH5220D1029	Heat/Cool/Heat Pump	2/2	Hardwired or Battery	56.99

## Pro 3000 Electronic Non-Programmable Thermostats

Honeywell

- Backlit display
- Precise comfort control
- Show both current and set temperatures at the same time



**27<sup>99</sup>**

L40-837

Order #	Mfg. #	System Application	Stages Heat/Cool	Power Method	Price
L40-837	TH3110D1008	Heat/Cool/Heat Pump	1/1	Hardwired or Battery	27.99
L40-838	TH3210D1004	Heat Pump	2/1	Hardwired or Battery	37.99

## 80 Series™ Electronic Non-Programmable Thermostat

- Single-stage
- Classic design with lighted display
- Hardwired or battery powered
- Mfg. #1F86-344

**32<sup>99</sup>**  
L38-348



White  
Rodgers

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

## Blue™ Non-Programmable Thermostat

- Single-stage
- Easy to read 2 sq. in. Blue™ display
- Exclusive easy push-connect color coded terminal
- Hardwired or battery powered
- Mfg. #1F86-0244

**29<sup>99</sup>**  
L44-677



White  
Rodgers

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

## Blue™ Easy Set Thermostats

- L45-322 single-stage, L45-323 heat pump
- Non-programmable
- Easy to read 2 sq.in. Blue™ display
- Home, Sleep and Away temperature pre-sets
- Exclusive sleep timer

**38<sup>99</sup>**  
L45-322



L45-322



L45-323



White  
Rodgers

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

Order #	Mfg. #	System Application	Stages Heat/Cool	Power Method	Price
L45-322	1F86EZ-0251	Heat/Cool/Heat Pump	1H/1C	Dual powered: battery or hardwired	38.99
L45-323	1F89EZ-0251	Heat/Cool/Heat Pump	2H/1C	Dual powered: battery or hardwired	46.99

New

## Blue™ Easy Install Thermostats

- Universal 4-wire thermostat solution
- Touchscreen with 12 sq. in. display
- Reusable plug-in configuration tool
- Color coded LEDs
- With outdoor sensor (L45-902 only)



L45-901



**178<sup>99</sup>**  
L45-901

Order #	Mfg. #	System Application	Stages Heat/Cool	Power Method	Price
L45-901	1F98EZ-1421	Heat/Cool/Heat Pump	1/1 Single stage, 2/2 Multi Stage, 4/2 Heat pump	Hardwired	178.99
L45-902	1F98EZ-1441	Heat/Cool/Heat Pump	1/1 Single stage, 2/2 Multi Stage, 4/2 Heat pump	Hardwired	188.99

\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

## Energy Management System

- Secure Wi-Fi connectivity and web portal for online management/diagnostics
- Economizer and ventilator control
- Track the performance of multiple locations
- Conduct remote diagnostics
- Intelligent automation, flexible programming and remote monitoring
- Mfg. #EB-EMS-02



**474<sup>99</sup>**  
L45-134

## Smart Thermostat

- Internet enabled
- Easy and efficient to install
- Manage and update thermostat online
- Supports multi-stage/hybrid systems
- Mfg. #EB-STAT-02



**299<sup>99</sup>**  
L45-169



## Extended Surface Pleated Filter

12 Pack PrePleat 40

- Dimensions: 20" x 25" x 2"
- MERV Rating: 8
- Pleats/Lin. Ft.: 10

# 35<sup>88</sup>

L97-532



\*Sold in carton quantities.

## Shurtape Duct Tape

- Aluminum Foil
- Size In. x Yds.: 2.5 x 60
- Approval/Listed:  
UL 181A-P &  
UL 181B-FX Printed
- Mfg. #AF-100

# 11<sup>25</sup>

G89-933



### Shurtape

## Condensate Trap

- Transparent trap allows visual inspection
- Watertight lower cap opens for easy access to clean drain pan outlet inside unit
- Includes flexible cleaning brush
- Mfg. #EZT-113B

# 5<sup>50</sup>

B13-547



### EZ-TRAP

## Pro Points® Sheet Metal Screws

- Precision formed drill point
- 5/16" hex head
- Screw Size: 10-16 x 3/4"
- Pkg. Qty.: 500

# 15<sup>99</sup>

G31-395



### DURO DYNE

## Condensate Pump

5 Pack

- Carton of 5
- 115V
- Safety Switch: Yes
- Shutoff: 15'
- Mfg. #VCMA-15ULS

# 149<sup>95</sup>

B81-119



Little GIANT

\*Sold in carton quantities.

## 100% Industrial Grade RTV Silicone Sealant

- Waterproof and weather proof
- Size: 10.1 Oz. Cartridge
- Clear
- Mfg. #0826/01

# 2<sup>70</sup>

G89-774



### Red Devil

## Media Air Cleaner Media

10 Pack

- Carton of 10
- For use with model 2200 air cleaner
- MERV 10 Replacement Media
- Mfg. #201

# 199<sup>90</sup>

L86-689



### Aprilaire® Fresh Ideas for Indoor Air

\*Sold in carton quantities.

## Solderless Terminal Kit

- Labeled, high impact polypropylene case with 18 compartments
- Contains 25 each of the most popular terminals
- Mfg. #JKIT

# 39<sup>99</sup>

G31-973



### JOHNSTONE



## Wet Switch™ Flood Detector

- Solid state control
- Turns system off when detecting moisture
- Simple 3-wire installation
- 24VAC
- Mfg. #WS-1

**29<sup>99</sup>**  
B12-876



## ClearVue™ Condensate Pump

- Innovative IQ Technology™ and Floatless Sensor™ technology
- Variable speed and lift
- Self-cleaning
- Super quiet operation
- Volts: 120
- Mfg. #IQP-120

**49<sup>95</sup>**  
B85-705



## Heat Pump Pad

- Gray recycled polypropylene material
- 8" ground clearance
- Fits up to 36" x 36" heat pumps
- Includes eight anti-vibration pads
- Length: 36"
- Width: 36"
- Height: 8"
- Mfg. #HP3636-8

**35<sup>99</sup>**  
B71-554



## Pro-Flush HVAC Flushing Solvent Refills

- For R-410A retrofits, refrigerant conversions and compressor burn-outs
- A single can treats 5–8 tons
- Mfg. #PF-16

**49<sup>99</sup>**  
B84-455



## SpeediChannel™

Line Set Cover System



DiversiTech SpeediChannel™ is an innovative channel system used to cover air conditioning line sets. The two part system has a base and a cover. The base is fastened to a wall or ceiling, then a clever little plastic clip (SpeediClip™) snaps into a channel already molded into the base. Then, using standard cable ties, the line set, cables, control wires, and/or condensate drain line are fastened in place. The cover then simply snaps on top of the base.



**10% OFF**  
all SpeediChannel™  
products

SpeediClip™ simply snaps into SpeediChannel™ track for speedy installation.



SpeediChannel™ is paintable, available in three widths, and great for both interior and exterior installations.

800.995.2222 [www.diversitech.com](http://www.diversitech.com)

## clear vue Kübe™

Condensate Pump—No Float, No Problem.

ClearVueKübe is the ideal condensate pump for ductless (mini-split) systems. Its compact size helps it fit almost anywhere and Kübe's super quiet operation makes it easy to live with. ClearVueKübe is also the smallest centrifugal tank pump, helping it outperform other ductless system pumps.



ultra quiet



clog-free



compact size



DESIGNED FOR  
DUCTLESS  
SYSTEMS

120v  
230v

STOCK NO.	DESCRIPTION	PRICE
B85-911	CLEARVUEKÜBE MINI-SPLIT PUMP	89.99
B85-912	CLEARVUEKÜBE MINI-SPLIT PUMP WITH SHROUD KIT	129.99

## Room Air Conditioner Hazardguard Model

- Ideal for oil rigs, petrochemical sites, paint storage and other hazardous locations
- Hermetically sealed reciprocating compressor and refrigeration system
- Type: Cool Only
- Volts: 230/208
- BtuH Cooling: 19,500/19,000
- Mfg. #SH20M30

**B91-439**



## Thru-the-Wall Condensing Unit

- Commercial grade construction
- Full front access for service
- Low RPM blower
- Heavy gauge powder coated cabinet
- Scroll compressor
- Nom. Tons: 2
- SEER: 11.5
- Max. Fuse Size: 30
- Mfg. #THDC-24TG

**B99-970**



## Wall-Mounted Single-Zone Air Conditioner

- Advanced inverter technology
- 208/230V
- Auto swing-louvers (up/down)
- Low-ambient operation built-in
- Washable, reusable air filters
- Auto-shut flaps close when unit is off for a sleeker appearance



B72-438



B72-439



## Wall Sleeve and Grille

- Wall sleeve constructed to minimize water entering between the wall sleeve and cabinet
- The bottom panel is notched to allow for condensate removal

**159<sup>99</sup>**

**B99-947**

Order #	Mfg. #	Description	For Use With	Price
B99-947	GRILLTAL	Grille Unpainted	T Series THDC & THHP	<b>159.99</b>
B99-957	TH/SLEEVE-T	Wall Sleeve	T Series THDC & THHP	<b>134.99</b>



**319<sup>99</sup>**

**B72-438**

Order #	Mfg. #	Unit Type	SEER	BtuH Cooling	Price
B72-438	MW12C1H	Indoor	20	12,000	<b>319.99</b>
B72-439	MR12C1H	Outdoor	20	12,000	<b>489.99</b>

## Packaged Terminal Heat Pump

- Easily installs into 16" x 42" wall sleeve
- 230/208V
- All units come with a 20 amp plug. Other plugs sold separately
- Type: Heat Pump
- BtuH Cooling: 9,000/8,800
- BtuH Heating: 8,100
- Mfg. #PDH09K3SF

**B72-433**



## R410A Packaged Rooftop Units

- We have a wide selection of R410A packaged rooftop units that fit a variety of applications
- Field convertible duct connections
- Slide-out blower and blower motor tray for flexible installation and easier maintenance
- Choose from 6.5 to 20 ton units



## Ductless Mini-Split System Single-Zone Air Conditioner

*Comfort-Aire*

- Multi-stage filtration
- 208/230V
- Sold as complete indoor/  
outdoor system ONLY
- Hot start (heat pumps) prevents  
discharge of cold air during heat mode
- Horizontal and vertical louvers  
can be set for air direction
- Full feature remote control included



B72-335



B72-336

**164<sup>99</sup>**

B72-335

Order #	Mfg. #	Unit Type	BtuH Cooling	Price
B72-335	B-SMA12SC	Indoor	12,000	<b>164.99</b>
B72-336	A-SMA12SC	Outdoor	12,000	<b>384.99</b>

## Ductless Mini-Split System Multi-Zone Heat Pump

*Comfort-Aire*

- LCD wireless remote controls
- Auto restart
- 208-230V
- Sold as complete indoor/  
outdoor system ONLY
- Indoor temperature display
- Airflow direction control
- 24-hour on/off timer
- Jet cool mode



Wall Mount



Outdoor

**254<sup>99</sup>**

B72-359

Order #	Mfg. #	Unit Type	SEER	BtuH Cooling	Price
B72-359	B-VMH09FC-1	Wall Mount	Up to 16*	9,000	<b>254.99</b>
B72-360	B-VMH12FC-1	Wall Mount	Up to 16*	12,000	<b>274.99</b>
B72-362	A-VMH27TC-1	Outdoor	16	27,000	<b>1199.99</b>

## Room Air Conditioner

*Comfort-Aire*



- R410A unit
- Electronic controls
- Insulated cabinets help  
avoid condensation and  
provide quiet operation
- Includes LCDI cord
- Easy access, cleanable filters
- BtuH Cooling: 18,200

**519<sup>99</sup>**

B72-508



## Portable Cooling Unit

- Electronic controls with  
soft-touch keypad
- Full feature remote control
- 24-hour on/off timer
- Fan only mode and three  
cooling speeds
- BtuH Cooling: 12,000
- EER: 8.7
- Air Delivery CFM: 261
- Mfg. #PD-121B

**464<sup>99</sup>**

B99-557



## Residential Gas Water Heater

**A.O. SMITH  
WATER PRODUCTS  
COMPANY**

### Promax™ Energy Saver Model

- DynaClean™ diffuser dip tube  
reduces lime and sediment buildup
- Permaglas coating for  
defense against corrosion
- Coregard anode rod with  
stainless steel core
- Gallons: 50
- BtuH: 40,000
- Mfg. #GCV-50

N98-079



## Water Heater Stand

**WATTS**

- Raises water heater flame  
element 18" above the floor as  
per Uniform Plumbing Code
- Reduces risk of fire, explosion  
and property damage
- Steel construction for  
safety and strength
- Gallons: 52
- Mfg. #0070012 AS-20WH

**37<sup>99</sup>**

N87-222



HVAC Equipment

## Ductless Mini-Split System

### Hybrid Flex Inverter System

- Multi-zone heat pump
- 208/230V
- Long piping up to 165+ feet
- Fujitsu's HFI multi-zone system offers mis-wiring detection
- Ion deodorizing and apple-catechin filter inverter system — variable speed compressor
- 24-hour timer and auto restart/reset
- B71-574 offers 4-way connection



Indoor



Outdoor

Order #	Mfg. #	Unit Type	SEER	BtuH Cooling
B71-562	ASU7RLF	Wall Mount	Up to 17.0*	7,000
B71-563	ASU9RLF	Wall Mount	Up to 17.0*	9,000
B71-564	ASU12RLF	Wall Mount	Up to 17.0*	12,000
B71-574	AOU48RLXFZ	Outdoor	Up to 17.0*	48,000

\*SEER is dependent on combination of indoor units selected.

## HFI Multi-Zone Installation Accessories



B17-758



B85-824

Order #	Mfg. #	Description
B17-758	UTP-PU03A	Primary Branch Box
B17-759	UTP-PU03B	Secondary Branch Box
B85-824	UTP-SX248A	Separation Tube Assembly Kit

## Room Air Conditioner

### Kühl Model Series



FRIEDRICH  
1883

- Commercial grade durability
- Energy saving 7-day programmable thermostat
- Terminals for optional wired remote thermostat
- Type: Heat/Cool
- Volts: 230/208
- BtuH Cooling: 11,700/11,200
- Mfg. #ES12M33



**719<sup>99</sup>**  
B90-949

## Ductless Mini-Split System

### Single-Zone Heat Pump



- High power airflow through advanced 1400 RPM DC motor
- 115V
- Line set and electrical cable not included
- Low ambient operation for outdoor temperatures down to 32° F
- Auto changeover from cooling to heating
- Wireless remote control standard



Indoor



Outdoor

Order #	Mfg. #	Unit Type	SEER	BtuH Cooling
B71-898	ASU12R2	Indoor	13.7	12,300
B71-899	AOU12R2	Outdoor	13.7	12,300

## Condensing Tankless Water Heater



- 96% thermal efficiency
- Dual heat exchanger
- Applicable for both residential and commercial applications
- Temperature range with standard MC-91-1 controller: 98°F–140°F
- Application: Indoor
- Gas Type: NG
- Mfg. #RC98HPiN



N98-415



## Rinnai Tankless Venting



- For models RC98 and RC80 condensing tankless water heaters



N87-387

**52<sup>99</sup>**  
N87-387

Order #	Mfg. #	Description	Price
N87-387	223176PP	12" Condensing Horizontal Termination Kit	52.99
N87-388	223177PP	21" Condensing Horizontal Termination Kit	53.99





**Evcon**  
Heating & Air Conditioning Products

## HVAC Products Specifically Designed for Mobile Homes

Electric Furnaces

Gas Furnaces

Line Sets



Coils



FitRight™ Fittings



Condensers

**Air Conditioners & Heat Pumps  
with the AccuCharge™ System**  
Pre-charged for mobile home applications  
and featuring FitRight™ couplings for fast,  
easy installations with **no sweat soldering  
or charge balancing required!**

## Air Conditioning Condensing Units

16 SEER, Two-Stage, 2 to 5 Tons,  
R410A

- ComfortNet™ communicating system
- Two-stage Copeland UltraTech scroll compressor
- Expanded ComfortAlert diagnostic built in
- Diagnostic indicator lights and storage of six faults codes
- 208/230V



Air Conditioning & Heating



Order #	Mfg. #	Nom. Tons	Min. Circuit Amps	Max. Fuse Size
B91-217	DSXC160241	2	14.0	20
B91-218	DSXC160361	3	21.8	35
B91-219	DSXC160481	4	27.4	40
B91-220	DSXC160601	5	33.0	50

## Horizontal Discharge Air Conditioning Condensing Units

13 SEER, Single-Phase,  
1-1/2 to 5 Tons, R410A

- Industry leading microchannel coil technology
- Compact "slim-line" design allows units to be stacked
- Units contain enough refrigerant for matching indoor coils and 15' of interconnecting piping
- Quiet operation



Order #	Mfg. #	Nom. Tons	Min. Circuit Amps	Max. Fuse Size
B91-939	TCHD18S41S3	1-1/2	11.8	20
B91-940	TCHD24S41S3	2	17.4	30
B91-941	TCHD30S41S3	2-1/2	17.5	30
B91-942	TCHD36S41S3	3	23.1	40
B91-943	TCHD48S41S3	4	27.1	45
B91-944	TCHD60S41S3	5	34.3	60

## Single Packaged Air Conditioners

15 SEER, Single-Phase,  
2 to 4 Ton, R410A, Multi-Position

- Energy-efficient compressor with internal relief valve
- EEM blower motor
- Convertible airflow — horizontal or downflow
- Copper tube/aluminum fin coil
- Electric heat kit available as a field-installed accessory
- 208/230V



Air Conditioning & Heating



Order #	Mfg. #	Nom. Tons	BtuH Cooling	Min. Circuit Amps
B90-058	GPC1524M41	2	24,000	19.0
B90-059	GPC1530M41	2-1/2	28,000	21.0
B90-060	GPC1536M41	3	35,000	24.2
B90-061	GPC1542M41	3-1/2	40,000	26.7
B90-062	GPC1548M41	4	45,500	29.2

**New**

## Refrigeration System Analyzers

- Fast and accurate diagnostics on all AC/R systems
- Two temperature probe inputs for simultaneous real-time calculation of superheat and subcooling
- Includes two pipe clamp probes, batteries, calibration protocol and hard case
- H85-610 includes built in vacuum gauge



**359<sup>99</sup>**

H85-592

Order #	Description	Price
H85-592	550-2 Refrigeration System Analyzer Kit	359.99
H85-610	557 Refrigeration System Analyzer Kit w/ Vacuum Gauge	472.49

## Sealright Quick Couplers

- Immediately traps refrigerant in the hose when disconnected
- Helps meet non-venting regulations and prevents finger burns



**9<sup>99</sup>**

B11-958


Order #	Mfg. #	Description	Price
B11-958	19109	SealRight Adapter Straight	9.99
B11-959	19209	SealRight Adapter 90°	9.99

## Charging Hose Set

- Rated for 4,000 PSI burst pressure and 800 PSI working pressure, approved for R410A
- Standard 1/4" fitting on one end, compact ball valve on the other end
- Yellow, Red & Blue Set
- Mfg. #29985

**79<sup>99</sup>**

B13-534

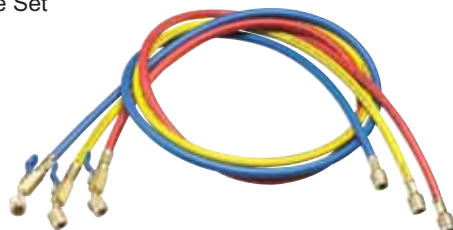


## R22/R404A/R410A Manifold

- 2-valve, forged brass body
- Includes three 60" hoses
- Large 3-1/8" glow-in-the-dark gauges
- Mfg. #M2-22231

**79<sup>99</sup>**

H26-670

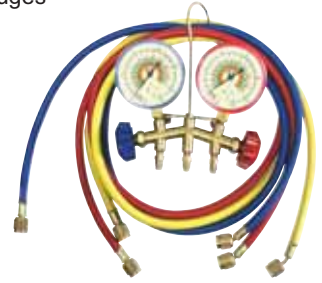

## R22/R404A/R410A Manifold

- 4-valve, forged brass body
- Includes three 60" hoses
- 2-1/2" gauges
- Mfg. #M4-5-410A

**109<sup>99</sup>**

H85-604



## R22/R410A/R407C Heat Pump Manifold

- 2-valve, forged brass body
- Two 800 PSI gauges for heat pump applications
- Includes three 60" hoses
- Large 3-1/8" gauges
- Mfg. #42044

**84<sup>99</sup>**

H27-156



## R22/R404A/R410A Manifold

- 2-valve, forged brass body
- Large 3-1/8" gauges
- Mfg. #42001

**47<sup>99</sup>**

H26-423



## DV-41 Supernova Digital Vacuum Gauge

- Measures in microns, PSI, inHg, Pascal, Torr, mTorr and mBar
- Programmable alarm, shut-off and backlight
- Accurate from 12,000 microns down to 10 microns
- Includes case and AC adapter
- Mfg. #DV-41

**179<sup>99</sup>**

H27-110



## DV-200N 7 CFM Platinum Series Vacuum Pump

- Two-stage pump with 15 micron rating
- Includes blank-off valve and check valve
- Made in the USA
- Mfg. #DV-200N

**389<sup>99</sup>**

H93-071



Test Instruments & Tools

## Black Gold Vacuum Pump Oil

- Specially formulated to be more refined, viscous and stable
- 1 Quart
- Mfg. #DVO-12-BX

**4<sup>99</sup>**

H85-227



## TIF9010A Refrigerant Scale

- 110 lb. or 50 kg. capacity
- Accuracy:  $\pm 0.5\%$  of reading
- Mfg. #TIF9010A

**124<sup>99</sup>**

H25-270



## SRS2 Wireless Refrigerant Scale

- Wireless handheld remote with backlight
- Remote stores within platform when not in use
- 220 lb. capacity
- Mfg. #SRS2C

**189<sup>99</sup>**

H26-914



## TIFZX Refrigerant Leak Detector

- 0.05 oz. per year sensitivity
- Heated Pentode™ sensor
- Detects all halogenated refrigerants
- Includes case and charger
- Mfg. #TIFZX

**239<sup>99</sup>**

H26-232



## SRL2K7 Infrared Leak Detector

- Auto recalibration for contaminated areas
- Detects CFC, HFC and HCFC
- Sensitivity down to 0.1 oz./yr.
- Mfg. #SRL2K7

**309<sup>99</sup>**

H26-793







### HS36 Stick Meter

- Designed for one-hand testing
- Manual ranging
- Connects to Fieldpiece accessory heads
- Mfg. #HS36



**174<sup>99</sup>**

H26-328

### SSX34 Superheat/ Subcooling Meter

- Dual-display of superheat/subcooling
- Includes K-type pipe clamp thermocouple
- Mfg. #SSX34



**219<sup>99</sup>**

H26-630

### 62 Mini IR Thermometer

- Laser sighting for easy targeting
- Distance to Spot Ratio: 10:1
- Temp. Range: -20° to +932°F
- Mfg. #62 mini



**84<sup>99</sup>**

H26-512

### Digital Remote Thermometer

- Min/max feature
- Includes remote sensor with 39" lead
- Range: -40°F to +122°F
- Mfg. #PM120-0-8J



**13<sup>99</sup>**

H26-908

### DL369 G2 Phoenix Clamp Meter



- Dual backlit display
- Built-in worklight
- Manual ranging
- Detachable head for use with accessory heads
- Mfg. #DL369



**52<sup>99</sup>**

H26-492

### 318-V Video Pro Scope

- Digital inspection scope with video output
- Includes clip-on mirror, magnet, batteries and case
- Mfg. #400563 VP42



**199<sup>99</sup>**

H85-536



### Extendable Magnetic Flashlight



- 3 bright LEDs
- Flexible shaft extends from 6-1/2" to 21" for hard-to-reach places
- Magnet on both ends for use as pickup tool
- Mfg. #EMF-1



**12<sup>99</sup>**

G35-864



New

## Torch Shield

- 8" x 12" flame barrier for brazing, soldering or welding
- Withstands direct flame without burning at temperatures in excess of 3000°F
- Contains no asbestos or ceramic
- Mfg. #PL-812

**18<sup>99</sup>**

H27-150



TurboTorch

## Nitrogen Regulator

- For testing and purging brazed joints
- Heavy-duty brass construction
- 1/4" flare outlet fitting
- Mfg. #245-03P

**59<sup>99</sup>**

H85-432



TurboTorch

## Twister 2 Self-Igniting Hand Torch

- Swirl combustion tip and trigger lock
- Flame tube swivels 360°, operates in any direction
- Brazes up to 1"
- For use with propane, MAPP® or MAP-Pro™ cylinders
- Mfg. #HT44

**45<sup>99</sup>**

H85-477



## TX504 Self-Igniting Hand Torch

- Extreme® swirl tip concentrates heat and reduces heating time
- Diaphragm regulator provides high gas flow for maximum temperatures
- Brazes up to 2"
- For use with propane, MAPP® or MAP-Pro™ cylinders
- Mfg. #TX504

**64<sup>99</sup>**

H25-403



TurboTorch



Test Instruments & Tools

## Nitrogen Regulator

- For testing and purging brazed joints
- Heavy-duty brass construction
- 1/4" flare outlet fitting
- Mfg. #245-03P

**59<sup>99</sup>**

H85-432



TurboTorch

## Twister 2 Self-Igniting Hand Torch

- Swirl combustion tip and trigger lock
- Flame tube swivels 360°, operates in any direction
- Brazes up to 1"
- For use with propane, MAPP® or MAP-Pro™ cylinders
- Mfg. #HT44

**45<sup>99</sup>**

H85-477



## Braze-Rite Adapter

- Quickly connects to manifold gauge hose and slips easily and securely into pipe
- Allows for bleed of nitrogen through pipe being brazed to keep pipes clean and oxide-free
- Mfg. #BRZ1000

**24<sup>99</sup>**

H26-966



## Sludge Sucker Kit

- For pressure testing AC/R systems for leaks, cleaning condensate lines and blowing off coils
- For use with nitrogen or CO2 (with adapter, sold separately)
- Tank not included
- Mfg. #40040

**126<sup>99</sup>**

H85-344



**New**

## Bucket Descaler

- Eliminates limescale and other deposits from tankless and standard water heaters
- Simply attach to water in/out and circulate with SpeedyBright descaler
- Includes bucket, two hoses and powerhead assembly
- Mfg. #SC-DS-5

**299<sup>99</sup>**

H89-881



## MagSnips® Replaceable Blade Snips



- Magnesium cast handles for maximum strength and minimum weight
- Replaceable blades are economical and easy to replace



H26-209



H26-672



H26-673

**22<sup>99</sup>**

H26-209

Order #	Mfg. #	Cut Type	Cut Length	Capacity	Price
H26-209	M1200	Straight	3.5"	22 Gauge	<b>22.99</b>
H26-672	M2210	Offset Left Cut	2.75"	24 Gauge	<b>22.99</b>
H26-673	M2110	Offset Right Cut	2.75"	24 Gauge	<b>22.99</b>

## Seal Pup Knife



- Partially serrated blade
- Contoured, reinforced Zytel handle
- Includes tactical nylon sheath
- Mfg. #M37-N

**49<sup>99</sup>**

H26-231



## Locking Tradesman Knife



- Quick release for fast blade changes
- Includes a wire stripper
- Mfg. #10771FLK1

**10<sup>99</sup>**

H26-686




## PowerLock Multi-Tool



- Exclusive gear-driven compound leverage
- 100% stainless steel construction
- Mfg. #S62-N

**56<sup>99</sup>**

H26-984

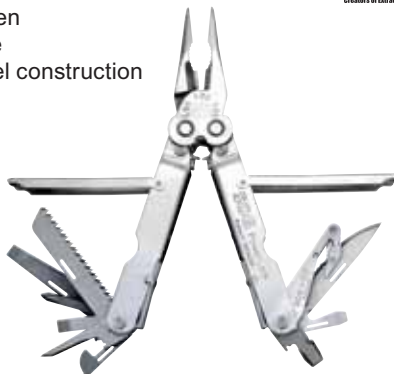

## Setting Hammer



- One-piece forged I-beam construction
- Leather grip
- Mfg. #SH3

**39<sup>99</sup>**

H25-168



## TurboShear

- Turn your drill into a power shear
- H26-198: 20 gauge capacity
- H26-365: 18 gauge capacity



**39<sup>99</sup>**

H26-198

Order #	Mfg. #	Description	Price
H26-198	TS1	TurboShear	39.99
H26-365	TSHD	TurboShear HD	69.99

## Vari-Bits®

- Steps make hole size identification easy
- Double flute design cuts burr-free holes
- Drills metals up to 1/8" thick

**LENOX**



**35<sup>99</sup>**

H26-333

Order #	Mfg. #	Description	Size	Price
H26-333	VB2	9 Step Vari-Bit	1/2" to 1"	35.99
H24-873	VB11	2 Step Vari-Bit	7/8" to 1-1/8"	49.99
H24-874	VB12	5 Step Vari-Bit	7/8" to 1-3/8"	54.99

## Magnetic Torpedo Level

- Large reversible easy-reading vials
- Heat-resistant, unbreakable endplates and internal aluminum frame
- Mfg. #839

**GENERAL**

**13<sup>99</sup>**

H23-907



## Measuring Tape

- Cushioned blade return
- Positive toggle lock holds blade securely
- Mfg. #L625

**Lufkin**

**4<sup>99</sup>**

H25-620



## 7-Piece Magnetic Tip Nut Driver Set

- Includes 3/16", 1/4", 5/16", 11/32", 3/8", 7/16" and 1/2"
- Cushion grip handles
- Mfg. #631M

**54<sup>99</sup>**

H26-636



**KLEIN TOOLS**  
For Professionals... Since 1857



## Wire Stripper

- For cutting, stripping and looping wire
- Strips 10 to 18 AWG solid wire
- Mfg. #11045

**9<sup>99</sup>**

H25-935



**KLEIN TOOLS**  
For Professionals... Since 1857

## 13-Piece Hex Key Set

- Includes 0.050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8"
- Mfg. #56612G

**7<sup>99</sup>**

H25-810

**ALLEN**



## 19-Pocket Tool Tote

- 11 multi-use pockets inside and 8 outside
- 14" L x 5-1/2" W x 6" H
- Tools pictured not included
- Mfg. #1116

**10<sup>99</sup>**

H25-524

**CLC**  
WORK GEAR





## R404A Medium Temp Condensing Unit

- Air-cooled
- Charged with ester oil and dry nitrogen
- HP: 1
- Volts: 208/230-1
- BtuH Capacity @ 30°F Evap.: 9,520
- Mfg. #AJA7480ZXDXC

# 849<sup>99</sup>

B94-938



## Low Silhouette Unit Cooler

- Easy front access
- Suitable for use with R22, R507, or R404A
- Defrost: Air
- Volts: 115-1
- BtuH @ 10° TD: 9,000
- Mfg. #LSC090AK

# 499<sup>99</sup>

B92-119



Refrigeration & Air Conditioning

## Condensing Unit Enclosure

- Cut-out provided for installation of refrigeration lines
- Knock-outs on two sides of enclosure to allow for different electrical connection orientation
- Depth: 26"
- Width: 22"
- Height: 18"
- Mfg. #ETC-150

# 114<sup>99</sup>

B92-575



## Solenoid Valve

- Direct acting, normally closed
- Valve and coil sold separately
- Port Size: 7/64"
- Conn. Size: 3/8" ODF
- R22 Capacity: 1.27
- Mfg. #100RB2S3

# 26<sup>99</sup>

B12-235



## Solenoid Valve Coil

- UL listed; CSA approved
- 120V Solenoid Coil
- Mfg. #AMG-120

# 25<sup>99</sup>

B12-311




## Viper Foaming Coil Cleaner

- No hazardous vapors or toxic ingredients
- No odors; non-flammable; biodegradable
- NSF registered for use in all food processing areas
- Size: 17 Oz.
- Mfg. #RT375A

# 5<sup>99</sup>

B84-509

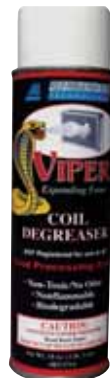

## Scrubs® In-A-Bucket

- Premoistened
- Textured on one side, soft on the other
- 80 wipes per bucket
- Mfg. #4366-87

# 14<sup>99</sup>

W89-187





## R404A Expansion Valve

- Balanced port design; externally equalized
- Removable strainer
- 3/8" ODF inlet x 1/2" ODF outlet
- Capacity Tons: 1/2
- Mfg. #HFESC1/2SC

**73<sup>99</sup>**

B16-832



## Sight Glass

- For use with CFC, HCFC and HFC refrigerants, including R410A
- Hermetic design
- Conn. Size: 3/8" ODF
- Mfg. #HMI-1TT3

**12<sup>99</sup>**

B12-461



## EK Series Liquid Line Filter-Drier

- Rated for use with R410A
- 600 PSI maximum working pressure
- Conn. Size: 3/8" ODF
- Cubic Inches: 16
- R22/R410A Capacity: 5.0
- Mfg. #EK-163S

**15<sup>99</sup>**

B12-266



## Commercial Defrost Timer

- Time initiated, remote temperature, pressure or time terminated
- NEMA 3R indoor/outdoor non-metallic enclosure
- Volts: 120/208/240
- 24-Hour
- Mfg. #DTMV40

**109<sup>99</sup>**

G33-030



## Mechanical Temperature Control

- Field adjustable differential
- Temperature range: -30°F to +100°F
- Switch action: SPDT
- Differential: 3° to 12°
- Sensing Element: 8' Remote (3/8" x 4")
- Mfg. #A19ABC-24C

**42<sup>99</sup>**

L36-931



## Fan Cycling Control

- Suitable for most refrigerants
- 36" capillary with 1/4" flare nut
- Pressure range: 100 to 400 PSIG
- Differential: 35 to 200 PSIG
- SPST, open low
- Mfg. #P70AA-118C

**49<sup>99</sup>**

B11-386



## Johnstone Supply Unit Bearing Motor

- 9 watt, single-speed, 1550 RPM, shaded pole
- CWLE rotation, 50/60Hz
- All-angle operation, continuous air over
- Diam.: 3-1/2"
- Volts: 115
- Mfg. #65411

**24<sup>99</sup>**

S55-411



## Replacement Filter-Drier Core

- For liquid and suction line filter-driers
- Removes sludge, moisture, acid and varnish
- Low pressure drop
- Standard Capacity
- Mfg. #PCK-48

**16<sup>99</sup>**

B11-300





### Totally Enclosed Condenser Fan Motor

- All-angle mounting
- 1075 RPM
- Diam.: 5-5/8"
- HP: 1/4
- Volts: 208-230
- Mfg. #1860

**58<sup>99</sup>**  
S88-501



\*Visit [www.emersonclimaterewards.com](http://www.emersonclimaterewards.com) for details.

### Fan Blade Puller

- Heavy-duty jaws
- Removes fan blades and blower wheels from rusty shafts



**46<sup>99</sup>**  
H24-801

Order #	Mfg. #	Description	Price
H24-801	A89000	Heavy-Duty Machined	46.99
H24-850	PG5099801	Pitch Gauge	22.99

### Liquid Line Drier



- Heavy gauge steel shell with all copper sweat fittings
- Compatible with all refrigerants and blends, including R410A
- Conn. Size: 3/8" ODF
- Cubic Inches: 8
- R22/R410A Capacity: 5.0
- Mfg. #083S



**12<sup>99</sup>**  
B10-120

### Foam Insulation Tape




- Easy-to-use tape that quickly insulates closed cell pipe
- 1/8" T x 2" W x 30' L
- Mfg. #K501

**8<sup>49</sup>**  
G89-930



### Universal Replacement Condenser Fan Blade 3 Blade

- Rugged, heavy-duty aluminum blade, with plated steel spiders
- Produces maximum air delivery with minimum noise
- Use with interchangeable hubs
- Size: 22"
- Pitch: 27°

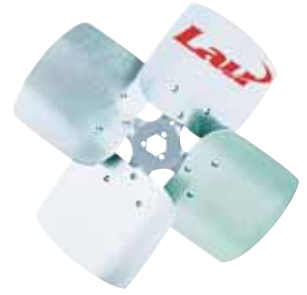

**33<sup>79</sup>**  
W89-012

### Insulation Tester/ Megohmmeter



- Measures insulation values up to 1,000 megohms at 500V and indicates the condition of insulation on the zone scale
- Uses two C batteries (not included)
- Mfg. #M500

**99<sup>99</sup>**  
H25-705



### Suction Line Filter-Drier



- Special desiccant for high acid pick-up
- Solid core design
- Conn. Size: 3/4" ODF
- Cubic Inches: 16
- R22/R410A Capacity: 2.0
- Mfg. #SLD8-6SVHH



**27<sup>99</sup>**  
B11-781

### Nu-Brite® Coil Cleaner



- High foaming, non-acid condenser cleaner
- USDA authorized
- Biodegradable
- Size: 1 Gallon
- Mfg. #4291-08

**14<sup>49</sup>**  
B81-558



## Hard Start Device

- Two-wire hard start device using potential relay with start capacitor
- No PTCR devices or time delays
- Works on 208-265V PSC and CSIR air conditioning, heat pump, and refrigeration compressors; reciprocating, scroll and rotary
- HP: 1 - 3
- Mfg. #TO-5

**27<sup>99</sup>**

B11-947



**Kickstart®**

## Delay On Make Timer

- Protects compressors against damage from rapid short-cycling
- SPST N.O. switch
- Time Delay: Adj. 0.03 to 10 Min.
- Volts: 18 to 240VAC
- Mfg. #ICM102B

**4<sup>99</sup>**

B11-834



**ICM**  
CONTROLS



Refrigeration & Air Conditioning

Made in USA

## Definite Purpose Contactor

- Compact design with low VA coil
- Includes box lugs and quick connect terminals side by side
- Ind. F/L Amps: 30
- Poles: 2
- Coil Voltage: 24
- Mfg. #C25BNB230T

**6<sup>79</sup>**

L37-120




**EATON**  
Powering Business Worldwide

## Compressor Terminal Repair Kit

- Fits standard compressor terminals
- Three screw-tight connectors and wire nuts
- Wire Gauge: 12
- Lead Length: 4'
- Pkg. Qty.: 3
- Mfg. #QT2912

**23<sup>99</sup>**

G32-266

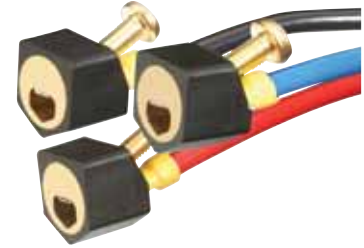

**MAINSTREAM**  
ENGINEERING

## Super Seal HVACR™ Leak Sealant

- Permanently seals multiple leaks in condensers, evaporators and lines
- Compatible with all oils and refrigerants
- Mfg. #944KIT

**46<sup>99</sup>**

B82-786



**CLIPIGHT**

## RX11-Flush® Refrigeration and Air Conditioning System Flush

- Engineered specifically for ozone-safe flushing of refrigeration and air conditioning systems
- Can be used for new system cleaning, retrofits and system cleaning after burn-outs and other failures resulting in system contamination
- 1 Lb. Canister
- Mfg. #4300-09

**43<sup>99</sup>**

B82-560



**Nu-Calgon**

## Acid-Away®

- Effectively removes acid buildup that occurs in refrigeration oils used in air conditioning and refrigeration systems
- Safe and easy to use treatment
- For use with mineral or alkylbenzene oils
- Mfg. #45004

**15<sup>99</sup>**

B12-007



**RECTORSEAL**

## Evap Foam® No Rinse

- Fresh scent evaporator coil cleaner
- Foaming, safe for indoor use
- 18 oz.
- Mfg. #4171-75

**6<sup>99</sup>**

B82-003



**Nu-Calgon**

## Premium Efficiency Motor

Three-Phase, Totally Enclosed Fan Cooled



- 1.15 Service Factor, rigid base
- Double shielded bearings, 40°C ambient
- Class F insulation
- NEMA design B
- HP: 10
- Volts: 208-230/460
- RPM: 1800
- Mfg. #U10P2D



**719<sup>99</sup>**

S91-579

## Commander HSK Variable Frequency Drive



- Configurations for HVAC, fan, pump control, torque control and PID control
- Simple pushbutton set up
- HP: 10
- Amps: 16.5
- Volts: 480
- Mfg. #HSKD3400750-E1



**949<sup>99</sup>**

G80-574

## Belt Tension Checker



- Verifies tension on all (3L, 4L, 5L, A, B, C, D, 3V, 5V, 8V) v-belts
- Unique, spring-loaded measuring graph leaves o-ring at current tension level
- Adjustable from 10" to 170" span and 35 lbs. of tension
- Instructions and handy pocket clip included
- Mfg. #1302546



**27<sup>99</sup>**

H27-031

## Freedom Series NEMA Starter



- Horizontal or vertical mounting on upright panel
- Holding circuit NO contact supplied as standard on each unit
- Designed for 3–5 million electrical operations and 10 million mechanical operations
- Starter, s size 2, 24 VAC coil, 9 - 45 FLA
- Mfg. #AN14GN0T3E045



**549<sup>89</sup>**

G35-448

## Three-Phase Motor Protector



- Basic protection for motors against loss of phase and unbalanced voltage conditions
- Disconnects the motor pilot circuit when monitored problem is detected
- Re-energizes circuit only when all three phases are activated at the full voltage rating
- Power consumption: 3 VA maximum
- Mfg. #TPMP2



**19<sup>49</sup>**

B13-541

## Variable Pitch Cast Iron Sheave



- Made of annealed cast iron
- Machined and balanced for reduced vibration and long belt life
- Set screw provided
- One-groove up through 10 HP
- O.D.: 3.15"
- Mfg. #1VL34



**36<sup>99</sup>**

L36-550

Save the Green™



Notched V-belts are an energy responsible substitute for wrapped style v-belts. In fact, the U.S. Department of Energy recommends using notched v-belts for improved efficiency. DOE/GO-102005-2060

NOTCHED BELTS | UP TO **98% Efficient**

Based on independent test results



WRAPPED BELTS | UP TO **95% Efficient**



First Choice Rewards Available Now!

Browning is registered trademark of Emerson Power Transmission Manufacturing. The Emerson logo is a trademark and a service mark of Emerson Electric Co. © 2011 Emerson Power Transmission. All rights reserved. MCAD09014





## Consider This...

The Energy Independence and Security Act went into effect December 19, 2010. It requires higher efficiency for newly produced motors. **Anything that positively impacts motor efficiency will dramatically impact energy consumption and will help save money on energy bills.**

- Motors consume **63% of the electricity** used by American industry.
- Motors consume **50% of the electricity** in commercial buildings.
- Cogged belts run cooler, last longer and have **efficiency about 2% higher** than that of standard v-belts.
- In variable torque applications like fans and blowers, a **Variable Frequency Drive can reduce speed-flow by 20% and can reduce power requirements by approximately 50%.**
- A 50HP premium efficiency motor can have a **payback in less than 10 months.**

### Premium Efficiency Motor Three-Phase, Open Dripproof



- 1.15 Service Factor, rigid base
- Ball bearing, 40°C ambient
- Continuous duty, NEMA design B
- Tested and designed to be 100% variable frequency drive compatible
- HP: 10
- Volts: 230/460
- RPM: 1800
- Mfg. #E397

**629<sup>88</sup>**  
S91-340



### Three-Phase Line Voltage Monitor



- Fully programmable with LCD diagnostic display
- Voltage unbalance: 2 to 20%
- Delay on break period: 0 to 10 minutes
- Universal voltage operation: 190-630 VAC
- Mfg. #ICM450C



**101<sup>99</sup>**

B12-400



Made in USA

### KC and KH Commercial Fan Blade



- Designed for use with air circulators, cooling towers and air cooled condensing units
- High quality steel
- 4 winged blades
- Use with MARS taper lock bushings
- Size: 48"
- Pitch: 38
- Mfg. #40216



**349<sup>97</sup>**

W91-171

### Taper Lock Bushing



- For use with KC and KH blades
- Type: H Bushing
- Hub Bore: 5/8"
- Mfg. #40232

**18<sup>79</sup>**

W69-424



### Thermostat Guard

- Provides complete enclosure protection
- Air circulating ports on all sides to ensure proper thermostat operation
- Single key can be used on all guards

- Clear Plastic
- Height: 5-3/8"
- Width: 8-1/4"

**9<sup>99</sup>**

L36-858





**Multifit™  
Multi-Horsepower Motor**  
42 Frame, TEAO

- Multiple mounting configurations with removable studs providing 3 bolt circles
- 60° max ambient
- Reversible rotation
- 36" leads
- Double sealed ball bearings
- Diam.: 5"
- HP: 1/4-1/6
- Volts: 208-230
- Mfg. #9723

**77<sup>99</sup>**  
S80-339



**Single-Phase  
Surge Protector**



- Protection for air conditioners, refrigeration systems and appliances from power spikes
- High impact, weatherproof plastic housing
- Indicator light for surge protection present on all models
- Max. Amps: 60,000
- Mfg. #SCM60

**33<sup>99</sup>**  
G32-614



**Condenser Fan Motor  
for Rheem-Ruud**

- Replaces Rheem-Ruud #51-21854-02
- PSC, totally enclosed
- Capacitor not included
- Diam.: 5-5/8"
- HP: 1/5
- Volts: 208-230
- Mfg. #5450

**104<sup>99</sup>**  
S89-229



**Disconnect Switch**



- Heavy-duty disconnects with two-position pullouts or switches
- Cover remains in place when open; protective shield covers wiring
- F/L Amps: 60
- Type: Metallic Non-fused
- Volts: 120/240
- Mfg. #DPU222R

**104<sup>9</sup>**  
G84-940



**Turbo™ 200 Universal  
Replacement Capacitor**

- Patented technique allows a metallized film capacitor to be tapped with a built-in common connection eliminating the necessity of separate capacitors
- Protected to 10,000 AFC
- Mfd: 2.5 to 67.5
- Volts: 370VAC or 440VAC
- Mfg. #12200

**48<sup>99</sup>**  
G33-036



**Control Transformer**

- Class 2 rated, easily mounts for use on low voltage control circuits
- Designed for over 60,000 hours of continuous use under normal load conditions
- 8" wire length
- VA Rating: 40
- Primary Voltage: 120/208/240
- Secondary Voltage: 24

**7<sup>99</sup>**  
G22-336



## PEP™ High-Efficiency Condenser Fan Motor

48 Frame, Single-Phase, PSC, Totally Enclosed Air Over

- Energy saving upgrade opportunity for PSC Condenser Fan Motor Application
- Designed for both residential and light commercial, A/C or heat pump applications
- Patent pending design is 76% efficient, saving up to 70 watts
- 70°C rated, with ball bearings
- All position - 48" leads
- Reversible
- 2 year limited warranty
- Diam.: 5-5/8"
- HP: 1/6
- Volts: 208-230
- Mfg. #1859PEP

**83<sup>99</sup>**

S81-408




## Motor Mounting Kit

- Single band standard-duty kit fits motors 4-3/4" to 5-5/8" diameter

**17<sup>99</sup>**

S58-094

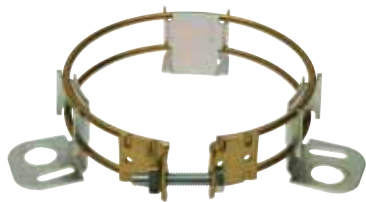

## Torsion Type Flexible Mount

- Fits 5" or 5.5" motor diameter and 9" or 10" mounting centers
- Motor Diam.: 5" or 5.5"

**24<sup>99</sup>**

S58-612



## Digital Capacitor Tester

- Rates run, start and DC electrolytic capacitors
- Two read-out ranges: 0.01 to 10 MFD and 10 to 10,000 MFD
- Includes soft carrying case
- Uses 9V battery (not included)
- Mfg. #MFD-10

**74<sup>99</sup>**

H24-883



Supco



Motors & Motor Accessories

## Test Leads

- Nickel plated steel construction for durability
- Suitable for a wide variety of applications
- Jaw Opening: 5/16"
- Mfg. #86070

**7<sup>99</sup>**

G35-794



MAIS

## Totally Enclosed Condenser Fan Motor

- Diam.: 5-5/8"
- HP: 1/3
- Volts: 208-230
- Mfg. #FE1036SC

**53<sup>99</sup>**

S89-731



ACSmith

## Prices Valid June 1–30, 2011 at Participating Johnstone Supply Stores

Johnstone Supply is committed to illustrate and describe all the products in this flyer accurately. Such descriptions and illustrations are for the purpose of identification, and do not imply that the products will conform to the descriptions or illustrations. Copyright © 2011 Johnstone Supply, Inc. Marca Registrada. All rights reserved, no part of this mailer or its inserts may be reproduced in any form without written permission from Johnstone Supply, Inc.

**New**

### Dual Range Non-Contact Voltage Tester

**KLEIN TOOLS**  
For Professionals... Since 1857™

- Automatically detects low and high voltage (12-1000VAC)
- Auto power-off
- Mfg. #NCVT-2



**14<sup>99</sup>**

H27-154

### i3 Compact Thermal Imager

- Easy-to-use, pocket sized troubleshooting tool
- 2.8" display with 60 x 60 pixel resolution
- Temp. Range: -4°F to +482°F
- Mfg. #IRC30



**EXTECH**  
INSTRUMENTS  
A FLIR COMPANY

**1195<sup>00</sup>**

H27-153

### 11-In-1 Screwdriver

**KLEIN TOOLS**  
For Professionals... Since 1857™

- Includes Schrader valve core removal tool and threader tip
- Cushion-grip handle for greater torque and comfort
- Mfg. #32527



**13<sup>49</sup>**

H27-026

### DV-6E Eliminator 6 CFM Vacuum Pump

- Two-stage pump with 25 micron rating
- Made in the USA
- Mfg. #DV-6E



**JB**

**279<sup>99</sup>**

H93-124